

General Purpose Gauges


Series P-915 Low Cost Metric Utility Gauges

DESCRIPTION

U.S. Gauge P-915 utility gauges provide economical, reliable service in a wide variety of applications including pumps, compressors, and other equipment.

Series P-915 utility gauges come in English and metric ranges with accuracy of either ± 3 -2-3% or $\pm 1.6\%$ full scale.

Gauges are available in 40 mm, 50 mm, and



SPECIFICATIONS

RANGES: 0-30, 60, 100, 160, 200, 300, 600, 1000, 2000, 3000, 4000 psi

4000 poi

ACCURACY: ±3-2-3% (Grade B) or ±1.6% of span


BOURDON TUBE: Phosphor bronze

WINDOW: Polystyrene (polycarbonate optional)

DIAL: ABS
POINTER: ABS
CASE: ABS

CONNECTION: Brass, center-back or lower mount 1/8-27 NPT: for 40 mm and 50 mm

1/8-27 NPT: for 40 mm and 50 mm 1/4-18 NPT: for 50 mm and 63 mm G1/8B, G1/4B, R1/8, R1/4

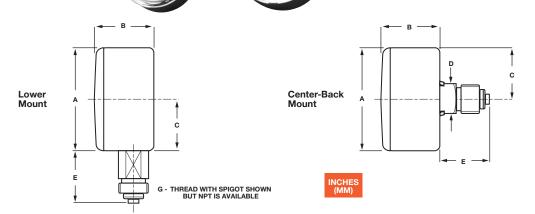

DIAL SIZE	MODEL	UNIT	ØA	В	C	D	E
40 mm	LM	inches	1.63	.92	.36	-	.80
		mm	41.1	23.4	20.6	-	15.7
40 mm	СВМ	inches	1.63	1.06	.79	.55	.80
		mm	41.5	27.0	20.1	14	20.3
50 mm	LM	inches	1.91	1.06	.38	-	.97
		mm	49.0	26.7	24.5	-	20.5
50 mm	СВМ	inches	1.91	1.06	.95	.55	.92
		mm	48.7	27.0	24.1	14.0	23.3
63 mm	LM	inches	2.43	1.10	.39	-	.97
		mm	61.6	28.0	10.0	-	24.6
63 mm	СВМ	inches	2.43	1.10	1.19	.55	.92
		mm	61.6	28.0	30.3	14.0	23.3

Please call Product Marketing at (215) 355-6900 for more information

© 2006, by AMETEK, Inc. All rights reserved. PDF606 (160126) Specifications are subject to change without notice. Visit our Web sites for the most up-to-date information.



U.S. GÁUGE 820 Pennsylvania Blvd. Feasterville, PA 19053 U.S.A. Tel: (215) 355-6900 Fax: (215) 354-1802 www.ametekusg.com - Customer Service Tel: (863) 534-1504 Customer Service Fax: (863) 533-7465

For Gauges/Thermometers:

For Electronic Products:
PMT PRODUCTS
820 Pennsylvania Blvd.
Feasterville, PA 19053 U.S.A.
Tel: (215) 355-6900
Fax: (215) 354-1800
www.ametekusg.com

For Diaphragm Seals: M&G PRODUCTS 8600 Somerset Drive Largo, FL 33773 U.S.A. Tel: (727) 536-7831 Fax: (727) 539-6882 www.ametek.com/tci