



Special Application Gauges

P-733 and P-734 Low Pressure Diaphragm Gauges

DESCRIPTION P-733

These high quality diaphragm gauges feature rugged construction with high sensitivity. They are ideally suited and designed for pressure measurements below 15 psi.



SPECIFICATIONS P-733

SIZE: 2-1/2"

RANGES:

0 to 15, 35, 60, 100, 200, in H₂O
 0 to 20, 32, 36 oz
 0 to 5, 10 psi
 Dual Scale: 0 to 20 oz./35 in H₂O

ACCURACY: $\pm 3-2-3\%$ of span

CASE: Steel, black corrosion-resistant paint

DIAL: Steel, white background with black markings

POINTER: Aluminum, black finish with adjustment feature

WINDOW: One-piece threaded acrylic

MOVEMENT: Brass

DIAPHRAGM CAPSULE: Copper alloy

CONNECTION: Brass 1/4-18 center-back male (CBM)

DESCRIPTION P-734

These gauges feature a highly sensitive diaphragm for extremely low positive or negative pressure applications. Gauges are housed in a rugged steel case with screw-in, acrylic window. The low mount connection is 1/4-18 NPT, brass.



SPECIFICATIONS P-734

SIZE: 2-1/2"

RANGES:

0 to 15, 35, 60, 100, 200, in H₂O
 0 to 20, 32, 36 oz
 0 to 5, 10 psi
 Dual Scale: 0 to 20 oz./35 in H₂O

ACCURACY: $\pm 3-2-3\%$ of span

CASE: Steel, black corrosion-resistant paint

DIAL: Steel, white background with black markings

POINTER: Aluminum, black finish with adjustment feature

WINDOW: One-piece threaded acrylic

MOVEMENT: Brass

DIAPHRAGM CAPSULE: Copper alloy

CONNECTION: Brass 1/4-18 low male (LM)

© 2006, by AMETEK, Inc. All rights reserved. PDF606 (160126) Specifications are subject to change without notice. Visit our Web sites for the most up-to-date information.

AMETEK[®]

ISO 9001:2000
 CERTIFIED

For Gauges/Thermometers:

U.S. GAUGE
 820 Pennsylvania Blvd.
 Feasterville, PA 19053 U.S.A.
 Tel: (215) 355-6900
 Fax: (215) 354-1802
 www.ametekusg.com
 Customer Service Tel: (863) 534-1504
 Customer Service Fax: (863) 533-7465

For Electronic Products:

PMT PRODUCTS
 820 Pennsylvania Blvd.
 Feasterville, PA 19053 U.S.A.
 Tel: (215) 355-6900
 Fax: (215) 354-1800
 www.ametekusg.com

For Diaphragm Seals:

M&G PRODUCTS
 8600 Somerset Drive
 Largo, FL 33773 U.S.A.
 Tel: (727) 536-7831
 Fax: (727) 539-6882
 www.ametek.com/tci



Special Application Gauges



P-733 and P-734 Low Pressure Diaphragm Gauges

SPEC NUMBER SELECTION CHART

Diaphragm Actuated Gauges, 2-1/2"

Model Number P-733 Center Back Connection	Range	1/4-18 NPT LM Spec No.
	15" H ₂ O	172284A
	35" H ₂ O	172285A
	60" H ₂ O	172286A
	100" H ₂ O	172287A
	200" H ₂ O	172288A
	20 oz.	172289A
	32 oz.	172290A
	36 oz.	172291A
	5 psi	172292A
	10 psi	172293A
	20 oz. / 35"	172294A

Model Number P-734 Low Mount Connection	Range	1/4-18 NPT LM Spec No.
	15" H ₂ O	161963A
	35" H ₂ O	161964A
	60" H ₂ O	162787A
	100" H ₂ O	161965A
	200" H ₂ O	161966A
	20 oz.	161967A
	32 oz.	161968A
	36 oz.	161969A
	5 psi	161970A
	10 psi	161971A
	20 oz. / 35"	161972A

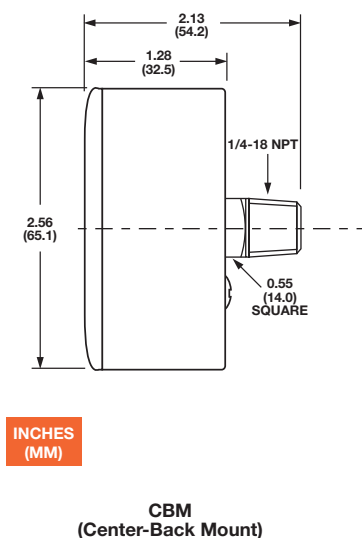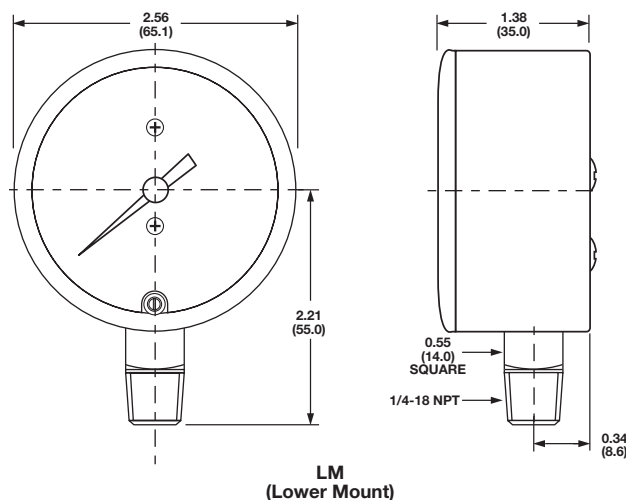

© 2006, by AMETEK, Inc. All rights reserved. PDF606 (160126) Specifications are subject to change without notice. Visit our Web sites for the most up-to-date information.

AMETEK®

ISO 9001:2000
CERTIFIED

For Gauges/Thermometers:

U.S. GAUGE
820 Pennsylvania Blvd.
Feasterville, PA 19053 U.S.A.
Tel: (215) 355-6900
Fax: (215) 354-1802
www.ametekusg.com
Customer Service Tel: (863) 534-1504
Customer Service Fax: (863) 533-7465

For Electronic Products:

PMT PRODUCTS
820 Pennsylvania Blvd.
Feasterville, PA 19053 U.S.A.
Tel: (215) 355-6900
Fax: (215) 354-1800
www.ametekusg.com

For Diaphragm Seals:

M&G PRODUCTS
8600 Somerset Drive
Largo, FL 33773 U.S.A.
Tel: (727) 536-7831
Fax: (727) 539-6882
www.ametek.com/tci